



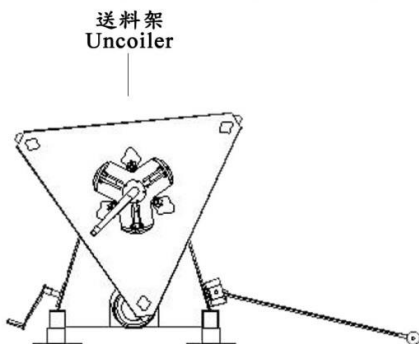

# H & 各式異型冷軋滾輪成型機

## H & Various Shaped Cold Roll Forming Mill

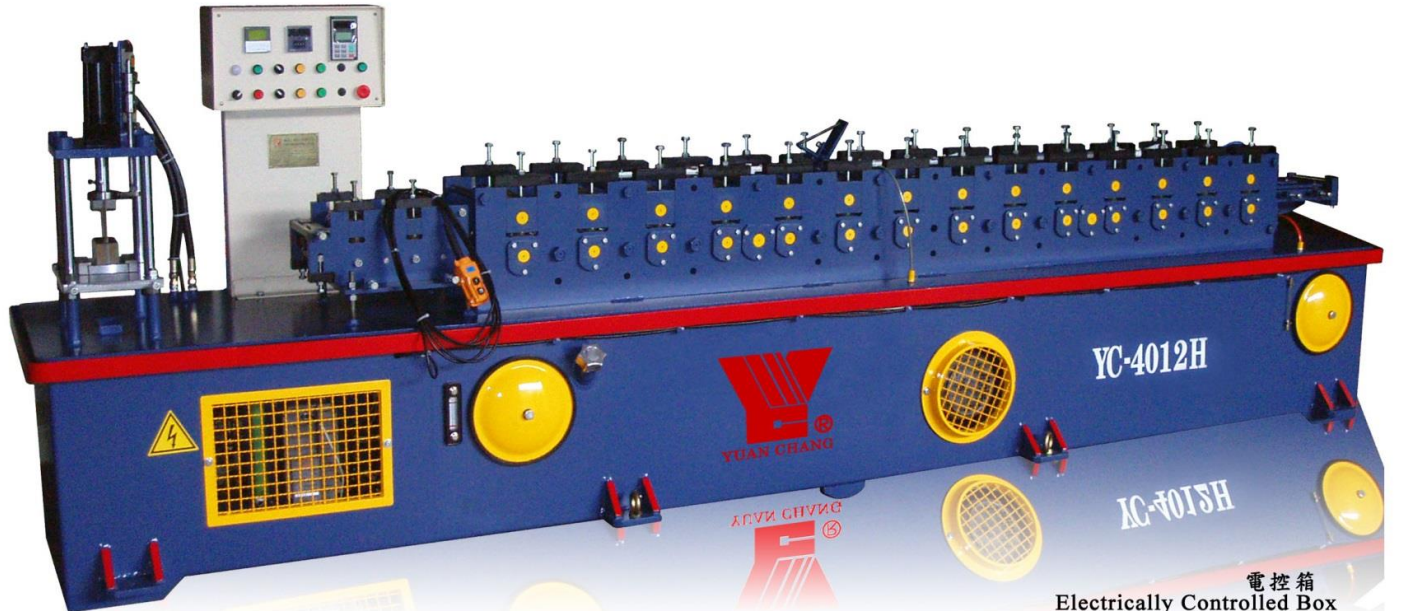

送料架  
Uncoiler


入口引導座  
Guidance Entry

滾輪成型主機  
Roll Forming Section

矯正輪座  
Straightening Wheel Section


切斷機  
Cutting Machine

電控箱  
Electrically Controlled Box

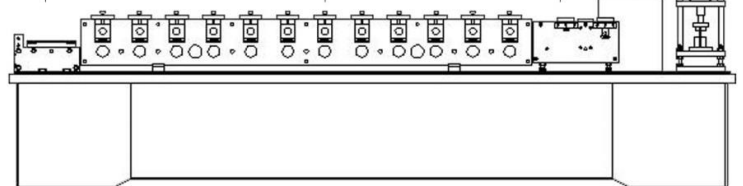


|                         |              |
|-------------------------|--------------|
| 機器型號<br>Machine         | YC-4012H     |
| 成品厚度<br>Thickness mm    | 0.6-3.2      |
| 成型速度<br>Forming Speed M | 15-35        |
| 軸心軸徑<br>Axle Center mm  | Ø40-60       |
| 成型段數<br>Forming Section | 8-14         |
| 主馬達<br>Main Motor HP    | 5-20         |
| 機器體積 (L×W)<br>Volume M  | 5-10×1.0-1.5 |
| 單頭料架載重<br>Uncoiler tons | 3            |


H Type



W-01



W-02



### Forming Capacity

| A   | B   | t (mm)  |
|-----|-----|---------|
| 35  | 34  | 1.1-1.2 |
| 50  | 34  | 1.1-1.2 |
| 75  | 34  | 1.2-1.5 |
| 100 | 50  | 1.6-1.8 |
| 150 | 75  | 2.0-2.5 |
| 200 | 100 | 2.5-3.2 |

機體結構：機體採用鋼板焊接而成，經熱處理，應力消除，機座堅固耐用。

生產製品：各式異型成品。

本機特色：1. NC 控制，操作簡易。

2. 本機可生產各種異型成品。

3. 成品長度、成型速度可自行調整。

4. 適用材料：冷軋板、鍍鋅板、不鏽鋼板。